




## Standard Hoist Dimensions



	CPE/CPEF	CPE/CPEF	CPE/CPEF	CPE/CPEF	CPE/CPEF	CPE/CPEF	CPE/CPEF	CPE/CPEF	CPE/CPEF
Model	16-8	20-8	25-5	30-5	32-4	40-4	50-2	75-1.6	100-2
A, mm	516	516	516	516	681	681	681	950	1068
A1, mm	286	286	286	286	428	428	428	479	651
A2 (13m), mm	430	430	430	430	430	430	430		
A2 (21m), mm	530	530	530	530	530	530	530	530	555
B, mm	35	35	35	35	45	45	45	60	60
C, mm	37	37	37	37	46	46	46	52	52
D, mm	24	24	24	24	30	30	30	40/45	40/45
E, mm	24	24	24	24	24	24	24		
F1, mm	160	160	160	160	160	160	160	160	160
F2, mm	178	178	178	178	178	178	178	178	178
G, mm	220	220	220	220	220	220	220	220	
G1, mm	180	180	180	180	140	140	140	268	315
G2 (13m), mm	257	257	257	257	218	218	218		
G2 (21m), mm	277	277	277	277	238	238	238	345	408
H1, mm	110	110	110	110	110	110	110	110	135
H2, mm	135	135	135	135	135	135	135	307	256
K1, mm	100	100	100	100	100	100	100	92	92
K2, mm	51	51	51	51	51	51	51	62	62
M, mm	50	50	50	50	10	10	10	138	
N, mm	84	84	84	84	124	124	124	136	390
Q1, mm	280	280	280	280	280	280	280	280	280
Q2 (CPE), mm	362	362	362	362	362	362	362	362	362
Q2 (CPEF), mm	417	417	417	417	417	417	417	417	417




Model CPE/CPEF with suspension hook, 1600 - 3000 kg, single fall



Model CPE/CPEF with suspension hook, 3200 - 5000 kg, double fall

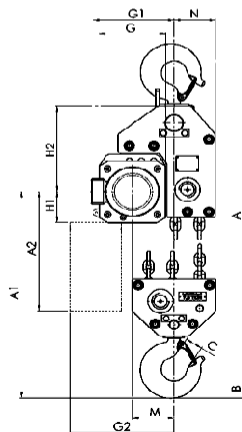


Model CPE/CPE/F 75-1, 6 with suspension hook, 7500kg

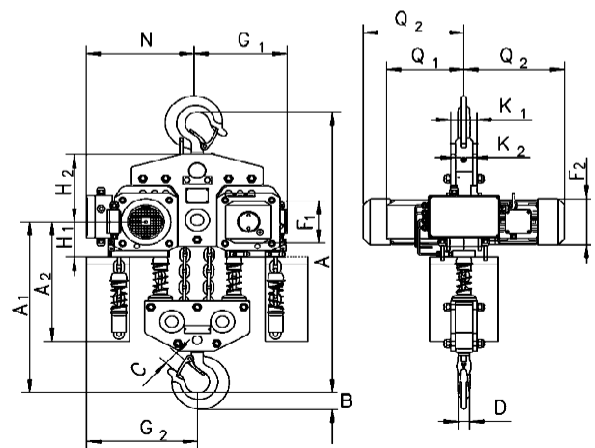


Model CPE/CPEF 100-2 with suspension hook, 10000kg

## With Trolley Dimensions


Model	CPE/CPEF 16-8	CPE/CPEF 20-8	CPE/CPEF 25-5	CPE/CPEF 30-5	CPE/CPEF 32-4	CPE/CPEF 40-4	CPE/CPEF 50-2	CPE/CPEF 75-1.6	CPE/CPEF 100-2
A3	121	121	121	121	121	121	121		110
A4	456	456	456	456	615	615	615	855	965
A5	298	298	298	298	298	298	298	477	450
A6	178	178	178	178	178	178	178		170
b	A=98-180 B= 180 - 300	A=98-180 B= 180 - 300	A=98-180 B= 180 - 300	A=98-180 B= 180 - 300	A=98-180 B= 180 - 300	A=98-180 B= 180 - 300	A=98-180 B= 180 - 300	125-310	125-310
F	150	150	150	150	150	150	150	113	113
I	142.5	142.5	142.5	142.5	142.5	142.5	142.5	170	170
L1	209	209	209	209	209	209	209	200	200
L2	262.5	262.5	262.5	262.5	262.5	262.5	262.5	215	215
L3 (VTE)	292	292	292	292	292	292	292		335
L3 (VTEF)	296	296	296	296	296	296	296		335
L4	213	213	213	213	253	253	253	215	390
L5	312	312	312	312	372	372	372	215	215
L6(VTE)	342	342	342	342	342	342	342		
L6(VTEF)	346	346	346	346	306	306	306		
o	125	125	125	125	125	125	125	150	150
P (VTE)	197	197	197	197	197	197	197		273
P(VTEF)	205	205	205	205	205	205	205		280
P1	229	229	229	229	229	229	229		110
S	b+70	b+70	b+70	b+70	b+70	b+70	b+70	b+98	b+98
T	94	94	94	94	94	94	94		94
tmax.	27	27	27	27	27	27	27	40	40

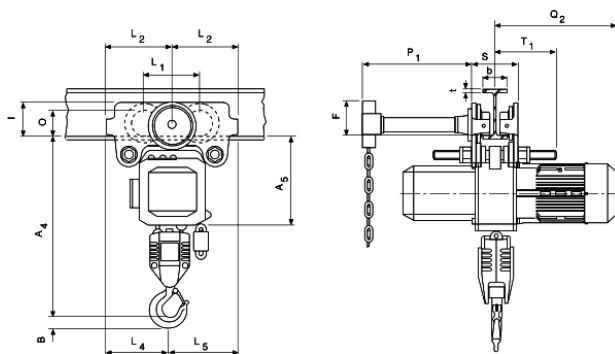


Model CPE/CPEF with integrated manual push or geared trolley

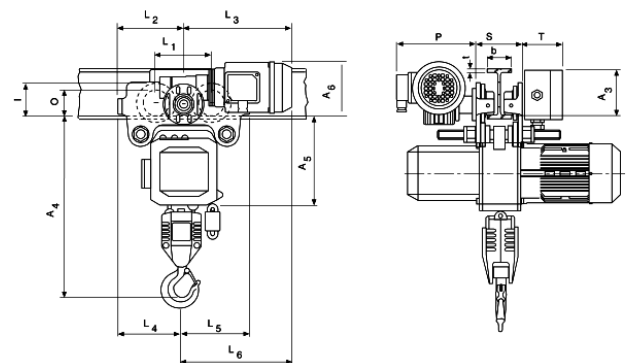

Model CPE/CPEF with integrated electric trolley

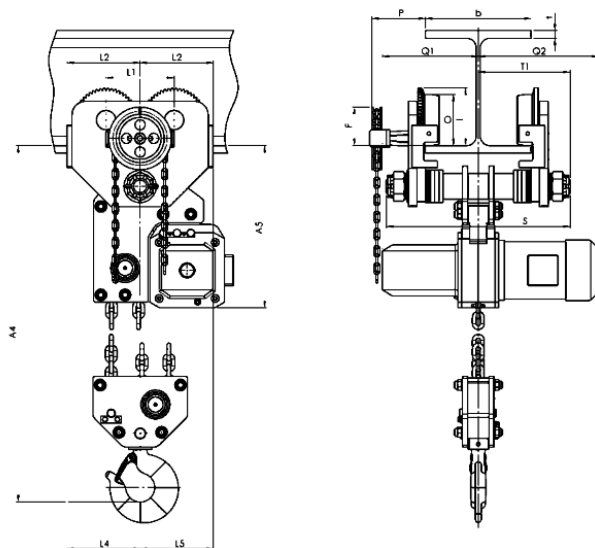

Model CPE/CPEF with integrated geared or electric trolley, 7500 kg

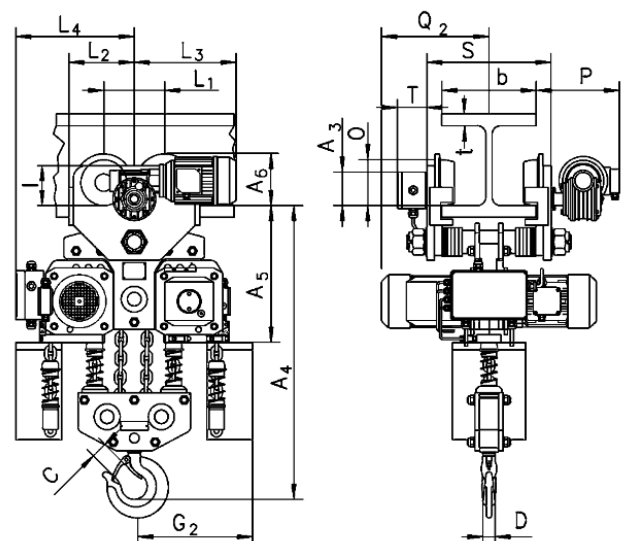

Model CPE/CPEF with integrated electric trolley, 10000 kg